




# Ultra Slim Relay Modules

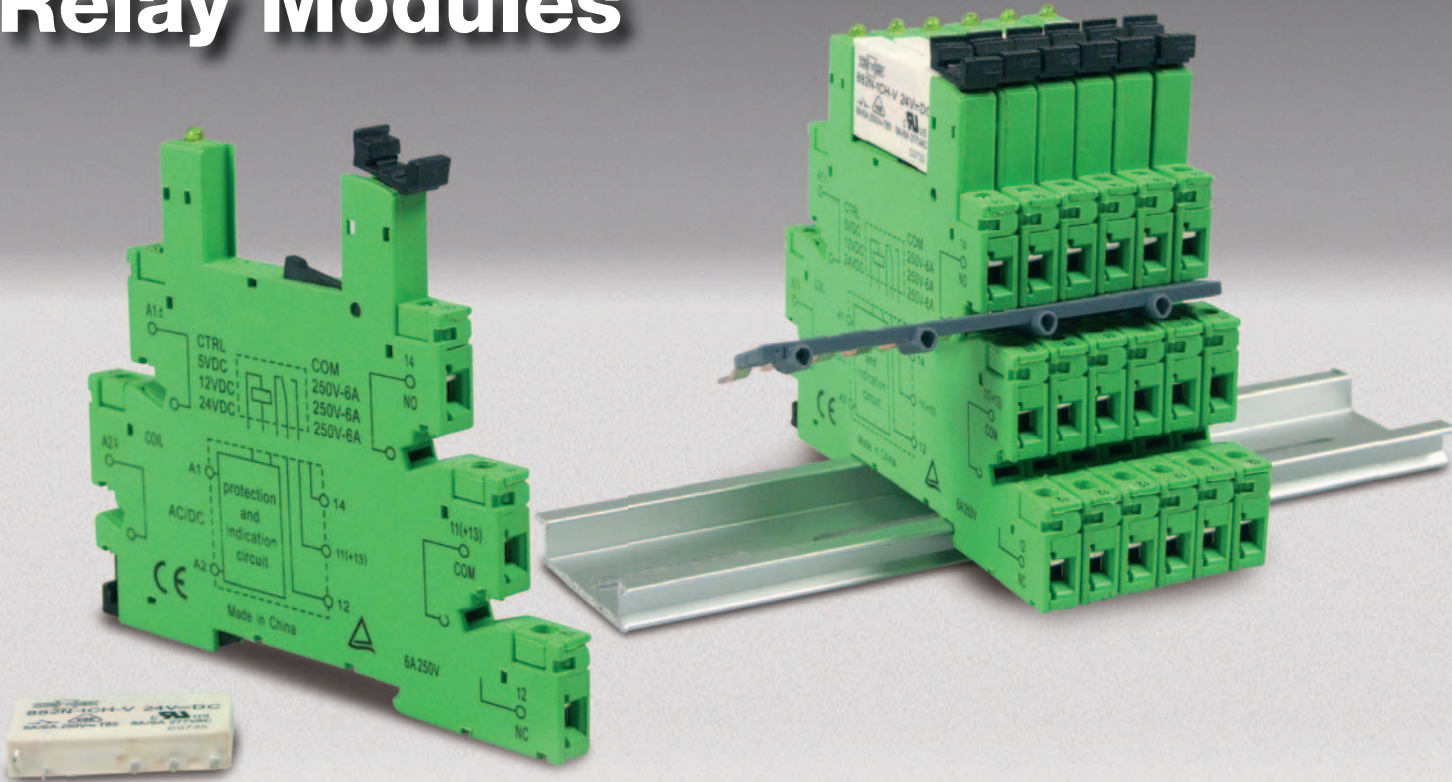


## FEATURES


- 6.2mm wide
- 1 x 6A C/O contact
- C/W LED indication
- Din mount
- Coil consumption 0.17w
- 24VAC/DC universal coil and base
- Main contacts 250VAC rated voltage
- Manufactured by Asia's largest relay distributor
- Simple removal of relay from base
- Relay and base supplied as one piece

Part No.	Description	\$ Price	Price Schedule
TIG-SLR24	24VAC/DC Ultra Slim Relay	24.00	E2
TIG-SLRCOMM8	8 Way 10A Commoning Bar	12.00	E2

Circuit / Terminal Layout:

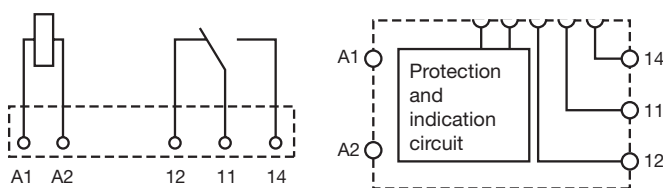

Dimensions:

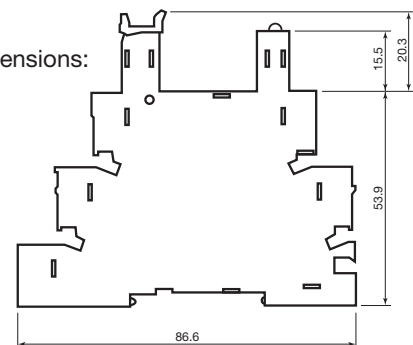

## NAW Controls

53 Commercial Drive, Thomastown Victoria 3074  
 Telephone: (03) 9464 6555 Fax: (03) 9464 5155  
 Email: [naw@nawcontrols.com.au](mailto:naw@nawcontrols.com.au) Web: [www.nawcontrols.com.au](http://www.nawcontrols.com.au)